


2.7 m Modular Buoy with the following equipment:
 (2) ASIMET with Iridium Telemetry
 (1) PAR

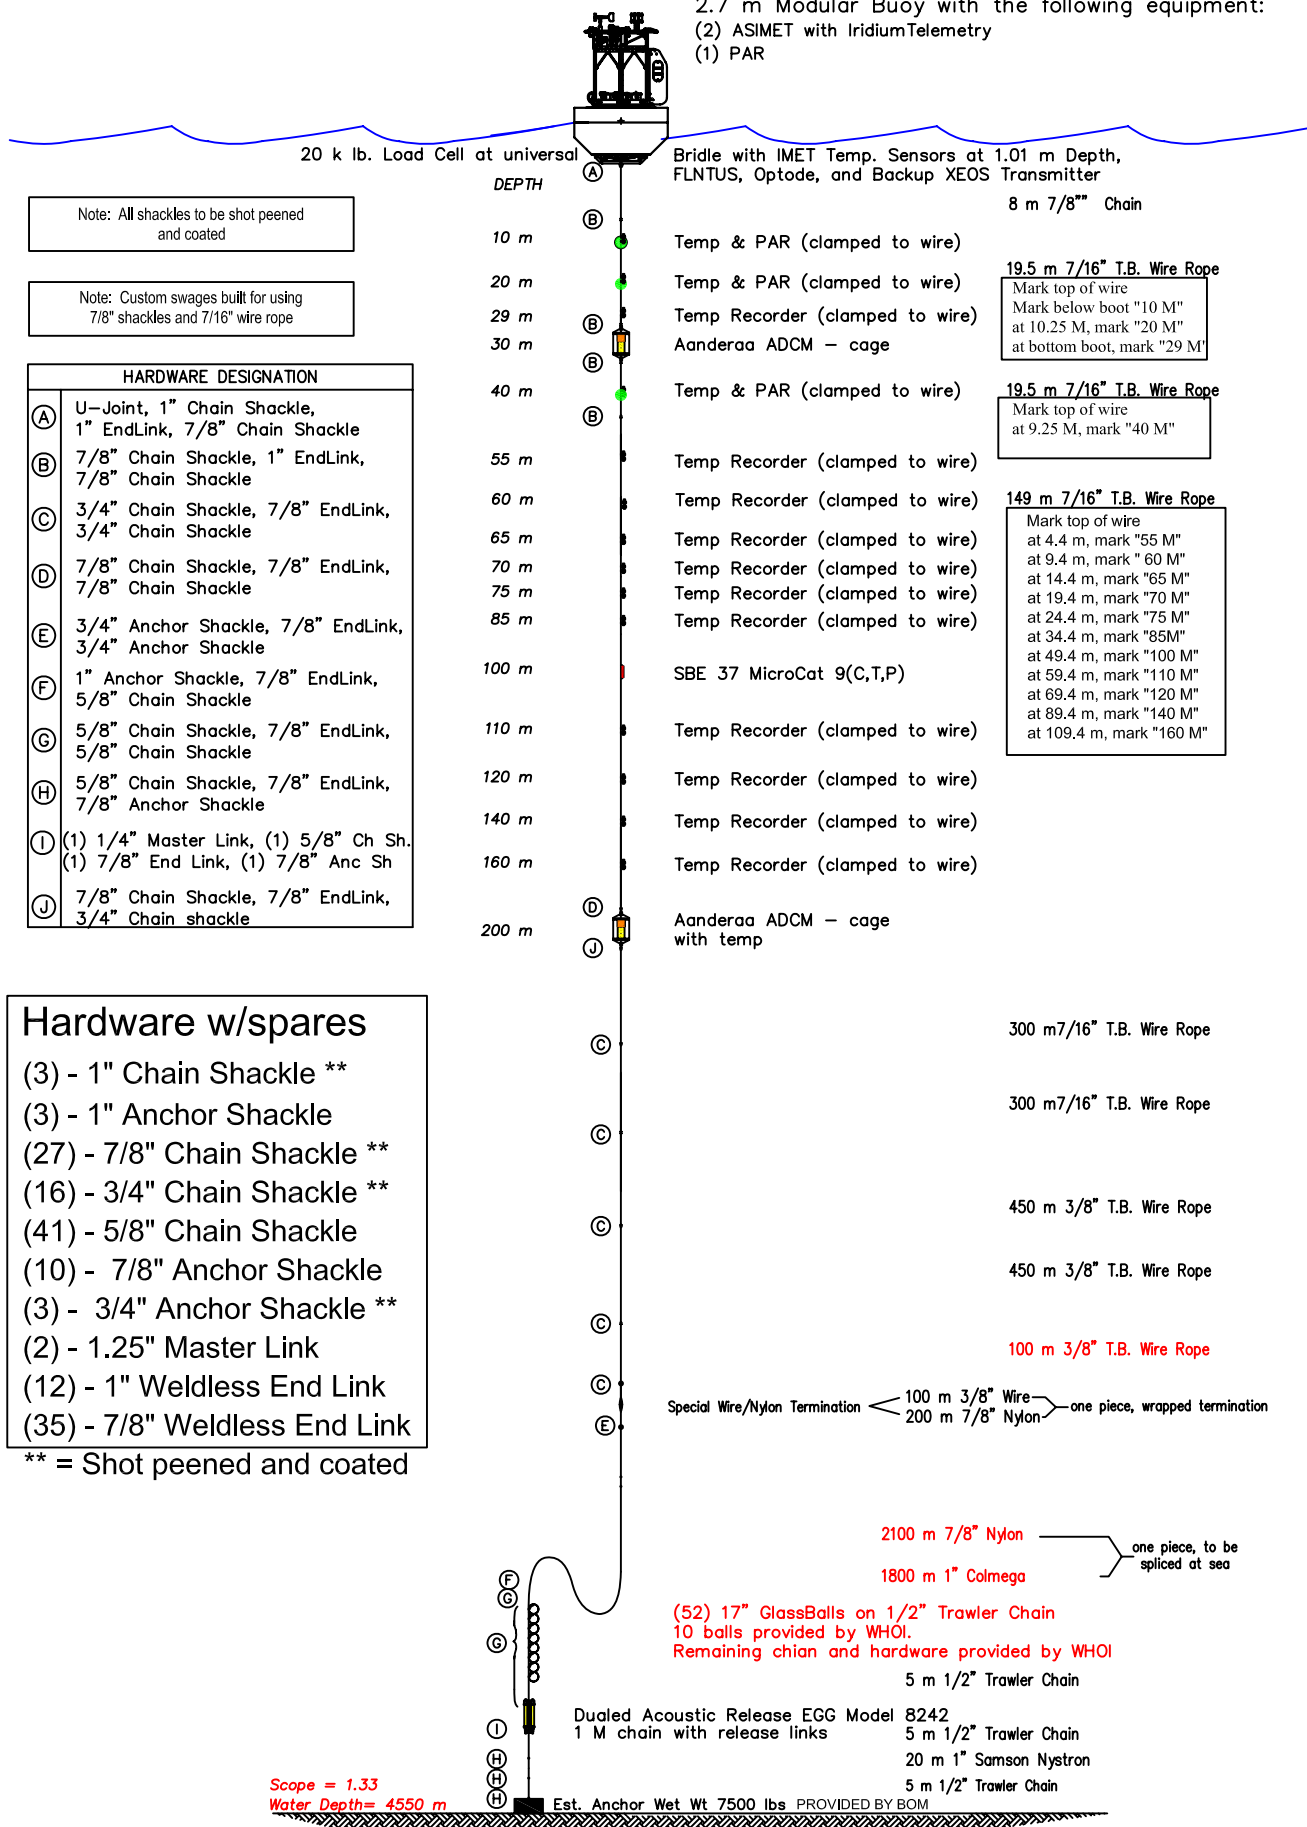

Note: All shackles to be shot peened and coated

Note: Custom swages built for using 7/8" shackles and 7/16" wire rope

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackle, 1" EndLink, 7/8" Chain Shackle
(B)	7/8" Chain Shackle, 1" EndLink, 7/8" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	7/8" Chain Shackle, 7/8" EndLink, 7/8" Chain Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(F)	1" Anchor Shackle, 7/8" EndLink, 5/8" Chain Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	(1) 1/4" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh
(J)	7/8" Chain Shackle, 7/8" EndLink, 3/4" Chain shackle

Hardware w/spares

- (3) - 1" Chain Shackle **
- (3) - 1" Anchor Shackle
- (27) - 7/8" Chain Shackle **
- (16) - 3/4" Chain Shackle **
- (41) - 5/8" Chain Shackle
- (10) - 7/8" Anchor Shackle
- (3) - 3/4" Anchor Shackle **
- (2) - 1.25" Master Link
- (12) - 1" Weldless End Link
- (35) - 7/8" Weldless End Link

** = Shot peened and coated

Scope = 1.33
 Water Depth = 4550 m

Est. Anchor Wet Wt 7500 lbs PROVIDED BY BOM

Southern Ocean Flux Station